DISPLAY SPOTLIGHTS

DA-011B-OS-3





Features & Application

- Very compact accent lighting, easy to merge into the ceiling
- 60° supreme cut-off angle, deep anti-glare structure ensures visual comfort
- Great heatsink design, for faster heat dissipation, which ensures stable and long lifespan of the light source
- 85% high efficiency light distribution with mellow light output

Suitable for desk illumination during presentations, able to satisfy reading or note-taking illuminance needs in a dark conference room.
Selectable color temperature :2700K、3000K、4000K

Photometric data

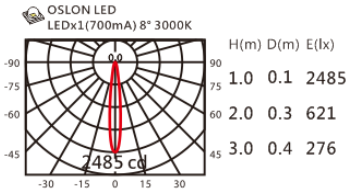

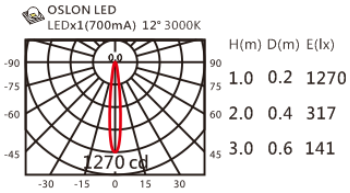





Product specifications

Light Source	OSRAM LED	Material	Aluminum
LED Luminous flux	180lm@3000K	Net Weight	0.04KG
Color rendering	Ra>90		
Watts	3W(700mA)		
AC Input	100-240V,50~60HZ		
Ballast/Transformer/Driver	HEP:LSC4W700-Z UNI (Independent)		
Reflector Angle	8、12、24、36		
Standards of Safety	● EN 60598-1:2015 ● EN 60598-2-2:2012		
Cord / Length / Connector	22 # LED red and black lines, outlet 30cm		
Color	WU、BK、SV		
Installation	Recessed		
Storage Temperature Range	Temperature : -20℃ to +50℃/ Humidity : 85%		

Accessories

Accessories for anti-dazzle (AC-501A)

Version : 1.0
2018.09.25