



WALL-MOUNT LUMINAIRES

DA-E04

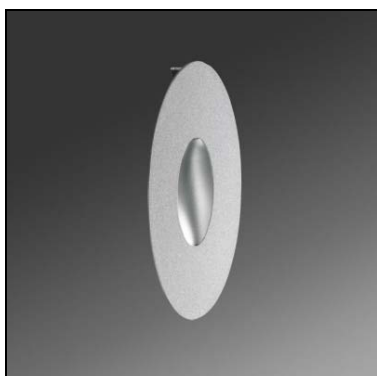


Features & Application

- ◆ The pre built-in cassette and spring structure enhanced efficiency of installation
- ◆ High quality LED with high luminous efficiency
- ◆ Great heat dissipation design which ensures long lifespan of the LED to save maintenance cost
- ◆ Special optical design for glare-proof which ensures visual comfort

Guidelight for exhibitions, hotel suites, offices and commercial applications.



Photometric data

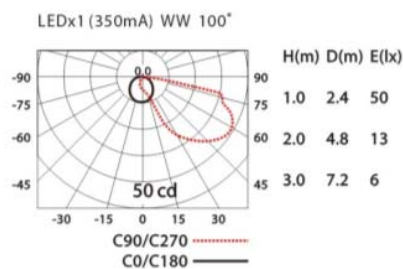

Product specifications

Light Source	OSRAM OSOLON LED 93lm Ra>80	Lamp Holder	/
Watts	1.2W*1 (350mA)	Net Weight	0.124kg
AC Input	100-277V, 50~60HZ		
Ballast/Transformer/Driver	HEP : LSC4W350L-Z(Independent)		
Reflector Angle	100°		
Color Temperature	3000K、4000K、5700K		
Standards of Safety	● EN 60598-1:2015 ● EN 60598-2-2:2012		
Cord / Length / Connector	22 # LED red and black lines, outlet 50cm+1W beam end		
Material	Aluminum		
Color	WU、BK、SV		
Installation	Recessed		
Storage Temperature Range	Temperature : -20°C to +50°C / Humidity : 85%		

Accessories

None