


BOLLARDS

GA-206A




Features & Application


- ◆ IP65 garden bollard light
- ◆ Special heatsink design for faster heat dissipation, which ensures stable and long lifespan of the light source



Landscape lighting for pavements, courtyards, outdoor parking lots, harbors, parks. Creating a romantic atmosphere at evening.




Photometric data

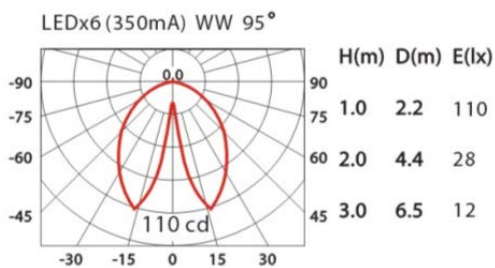

Product specifications

Light Source	OSRAM OSOLON LED 558lm Ra>80	Lamp Holder	/
Watts	1.2W*6 (350mA)	Net Weight	/
AC Input	100-277V, 50~60HZ		
Ballast / Transformer / Driver	HEP:LSC9W350P (Built-in)		
Reflector Angle	95		
Color Temperature	3000K、4000K、5700K		
Standards of Safety	●EN 60598-1:2015 ●EN 60598-2-1:1989 ●EN 60598-2-6:1994+A1:1997		
Cord / Length / Connector	Wiring terminal (The cable must be H05RN-F, 1.0mm ² , 3G)		
Material	Aluminum		
Color	BF		
Installation	Surface-mounted		
Storage Temperature Range	Temperature: -20°C to +50°C / Humidity: 85%		

Accessories



GA-206Q(Grounding Spike)