


RECESSED CEILING LUMINAIRES

HD-77(MD-D001)




Features & Application




- ◆ Recessed box light housing: 1 / 1×2 / 1×3 / 2×2
- ◆ Frame or trimless
- ◆ Various lamp modules or angles combined in one fitting is available
- ◆ 20° vertically tiltable
- ◆ Special lamp holder structure designed to replace the lamps easily

Ideal for exhibitions, commercial and residential applications.

Color Temperature: 2700K · 3000K · 4000K · 5000K



Photometric data

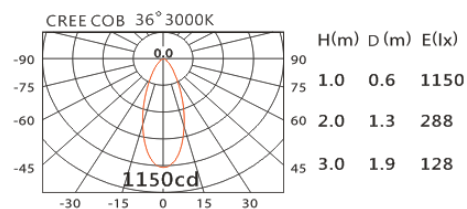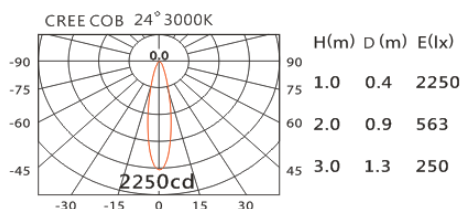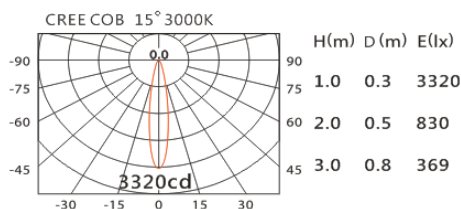

Product specifications

Light Source	CREE LED (COB)	Material	Aluminum
LED Luminous flux	700 lm@3000K	Net Weight	0.22KG
Color rendering	RA>90		
Watts	9.5W(450mA)		
AC Input	220-240V · 50~60HZ		
Ballast/Transformer/Driver	TONS:LCD-12-0450-NLE (independent)		
Reflector Angle	15 · 24 · 36		
Standards of Safety	● EN 60598-1:2015 ● EN 60598-2-2:2012		
Cord / Length / Connector	22# LED red and black line, outgoing line: 30cm + beam end		
Color	WU, BK, SV		
Installation	Recessed		
Storage Temperature Range	Temperature: -20°C to + 50°C / Humidity: 85%		

Accessories



Honeycomb
DL-77-AC2



Stretching film
AC-C50S-013040
AC-C50S-014060
AC-C50S-017053
AC-C50S-022067
AC-C50S-033060