

## IN-GROUND LAMPS

### ODL-003P




### Features & Application

- ◆ Optional light output: direct or side glowing
- ◆ Dust and moisture proof: IP67; against external mechanical impacts:IK10
- ◆ Special heatsink design for faster heat dissipation, ensures stable and long lifespan of the light source



Decorative in-ground light for aisles, corridors, courtyards, plaza and waiting zone of public transportation stations.

### Photometric data

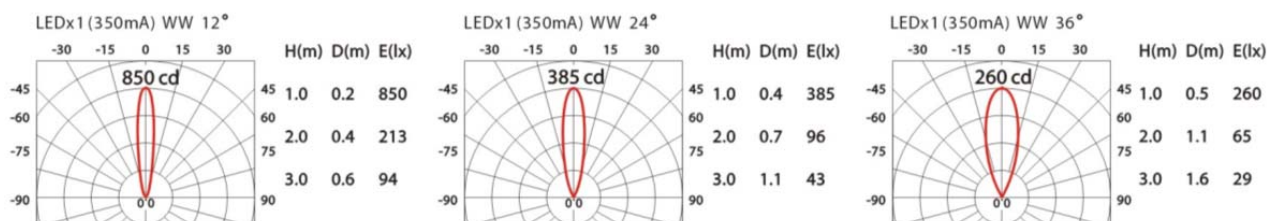

### Product specifications

Light Source	OSRAM OSOLON LED 93lm Ra>80	Lamp Holder	/
Watts	1.2W (350mA)	Net Weight	0.50kg
AC Input	100-240V, 50~60HZ		
Ballast/Transformer/Driver	HEP:LSC4W350LP (Independent)		
Reflector Angle	12、24、36		
Color Temperature	3000K、4000K、5700K		
Standards of Safety	● EN 60598-1 : 2015    ● EN 60598-2-13 : 2006+A1 : 2012 ● EN 60598-2-6 : 1994+A1 : 1997		
Cord / Length / Connector	H05RN-F1-2G cable, Outgoing 5m		
Material	Aluminum		
Color	SUS、FR		
Installation	Ground Recessed		
Storage Temperature Range	Temperature : -20°C to +50°C / Humidity : 85%		

### Accessories

None