



SA-8700-AD(C12)/HT4-BA40




Features & Application

- ◆ Patented 30° cut-off angle anti-glare louver to reduce the unnecessary spill light; and to trim the desired illumination on aiming object
- ◆ comprehensive optical accessories: focus, anti-glare, stretching and wall washing
- ◆ 12°~50° beam angles of reflectors available for different applications
- ◆ 355° horizontally rotatable and 180° vertically tiltable
- ◆ Systematic + Individual: dimmable trailing edge (100%~10%) + individual dimming (100%~30%)

Accent lighting for museums, art galleries and commercial applications.

Color Temperature: 2700K · 3000K · 4000K · 5000K

Photometric data

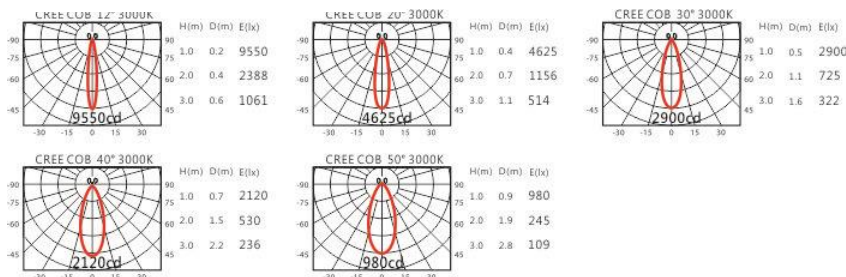

Product specifications

Light Source	CREE LED (COB)	Material	Aluminum
LED Luminous flux	1180 lm@3000K	Net Weight	0.58KG
Color rendering	RA > 90		
Watts	14W(350mA)		
AC Input	220-240V · 50~60HZ		
Ballast/Transformer/Driver	Tons:LCI-14-350-TNI(Trail&Only)(built-in)		
Reflector Angle	12 · 20 · 30 · 40 · 50		
Standards of Safety	● EN 60598-1:2015 ● EN 60598-2-1:1989 ● EN 60598-2-6:1994+A1:1997		
Cord / Length / Connector	HT4-22JK		
Color	WU, BK, SV		
Installation	Track system		
Storage Temperature Range	Temperature: -20°C to + 50°C / Humidity: 85%		

Accessories

