


PA-115A(O12)




Features & Application


- ◆ Simple and elegant, easy to install
- ◆ Accurate optical design ensures visual comfort

For residential and commercial applications; such as galleries, exhibition, cafeteria, bars etc.

Selectable color temperature : 2700K · 3000K · 4000K



Photometric data

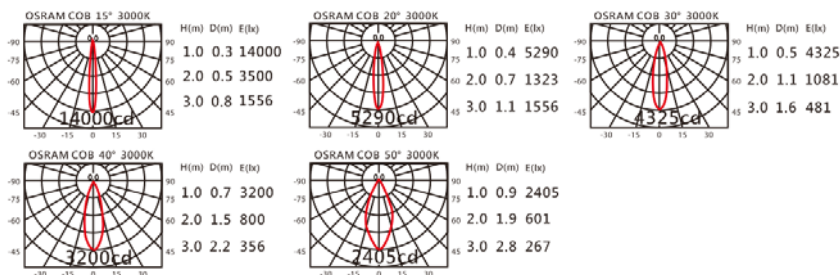

Product specifications

Light Source	OSRAM LED (COB)	Material	Aluminum
LED Luminous flux	1110 lm@3000K	Net Weight	/
Color rendering	RA > 90		
Watts	13W(350mA)		
AC Input	100-240V · 50~60HZ		
Ballast/Transformer/Driver	HEP:LSC20W350P(Built-in)		
Reflector Angle	15 · 20 · 30 · 40 · 50		
Standards of Safety	● EN 60598-1:2015 ● EN 60598-2-1:1989 ● EN 60598-2-6:1994+A1:1997		
Cord / Length / Connector	Terminals		
Color	WU · BK · SV		
Installation	Surface-mounted		
Storage Temperature Range	Temperature : -20°C to +50°C / Humidity : 85%		

Accessories



recessed ring (AC-2700A)